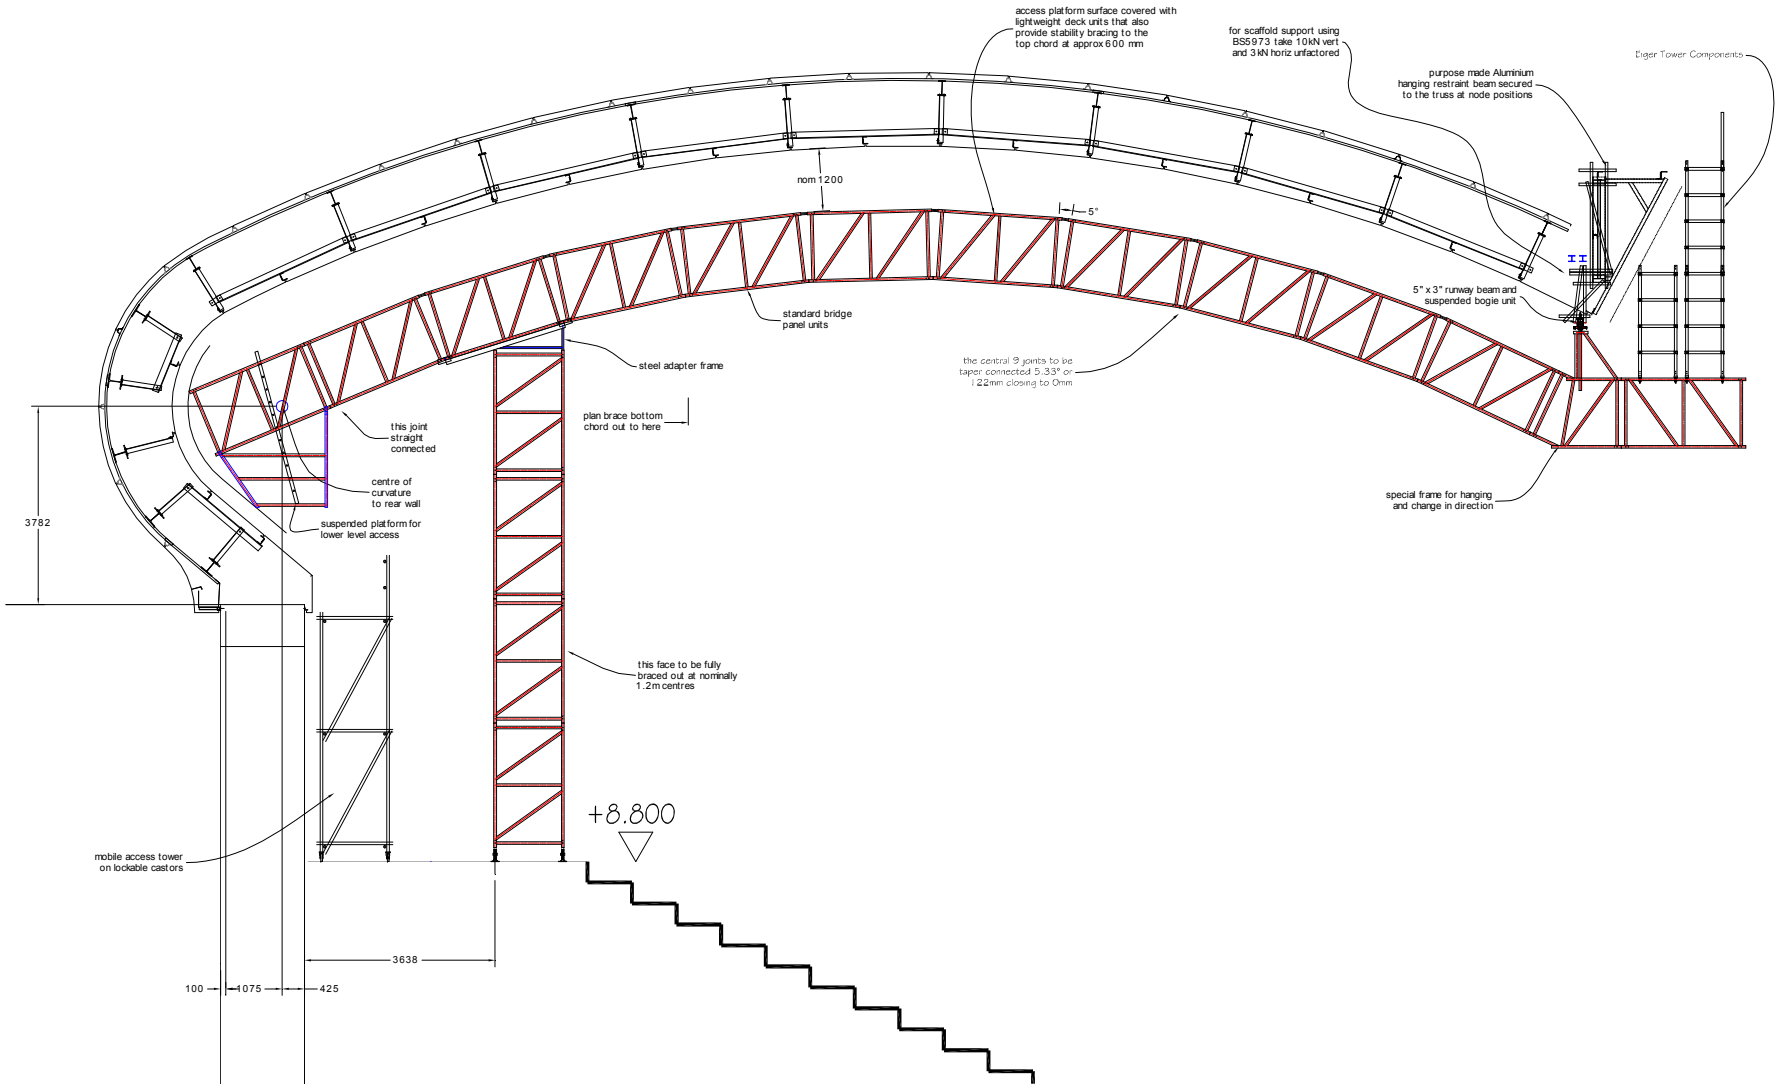
access platform surface covered with lightweight deck units that also provide stability bracing to the top chord at approx 600 mm
for scaffold support using BS5973 take 10kN vert and 3kN horiz unfactored
purpose made Aluminium hanging restraint beam secured to the truss at node positions
Tiger Tower Components
nom 1200
5°
5" x 3" runway beam and suspended bogie unit
standard bridge panel units
steel adapter frame
the central 9 joints to be taper connected 5.33° or 122mm closing to 0mm
plan brace bottom chord out to here
this joint straight connected
centre of curvature to rear wall
suspended platform for lower level access
3782
special frame for hanging and change in direction
this face to be fully braced out at nominally 1.2m centres
+8.800
mobile access tower on lockable castors
3638
100
1075
425