




ALUMINIUM ACCESS TOWER SYSTEM

- Double width aluminium access tower system available in 1.45m
- Also available in single width 0.85m span
- Available in 3 lengths: 1.8m, 2.5m and 3m
- Provides freestanding access up to 10.2m working height externally, 14.2m working height internally
- Supplied with step-by-step assembly instructions
- Easily linked using LiteTOWER aluminium walkways

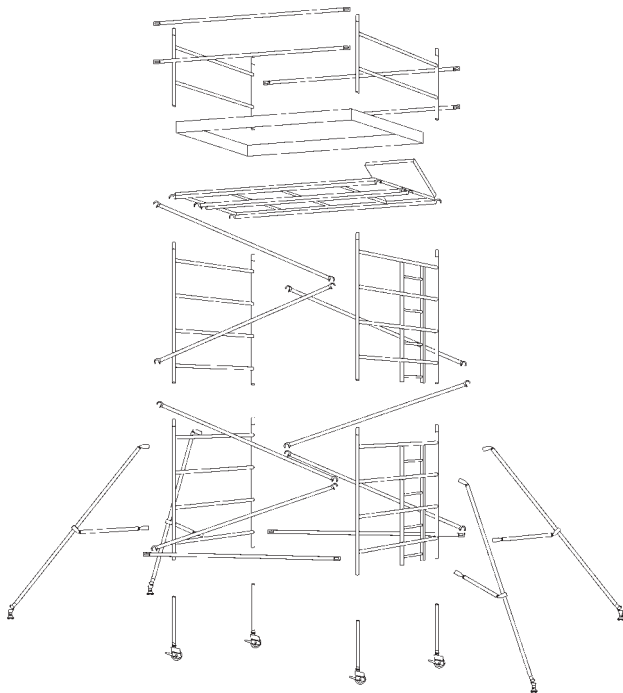

Components for DW Access Tower System Available in 3 lengths: 1.8m, 2.5m and 3m

LiteTower DW Access Tower System	Internal and External												Internal use only								
	4.2	4.7	5.2	5.7	6.2	6.7	7.2	7.7	8.2	8.7	9.2	9.7	10.2	10.7	11.2	11.7	12.2	12.7	13.2	13.7	14.2
Working Height (m)	2.2	2.7	3.2	3.7	4.2	4.7	5.2	5.2	6.2	6.7	7.2	7.7	8.2	8.7	9.2	9.7	10.2	10.7	11.2	11.7	12.2
Castor	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
Adjustable Leg	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4
2 Rung Ladder Frame	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2 Rung End Frame	2	0	0	2	2	0	0	2	2	0	0	2	2	0	0	2	2	0	0	2	2
3 Rung Ladder Frame	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0
3 Rung End Frame	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1	0
4 Rung Ladder Frame	1	1	2	1	2	2	3	2	3	3	4	3	4	4	5	4	5	5	6	5	6
4 Rung End Frame	1	1	2	1	2	2	3	2	3	3	4	3	4	4	5	4	5	5	6	5	6
Standard Platform 1.8m, 2.5m 3m	1	1	1	1	1	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3
Hatch Platform 1.8m, 2.5m, 3m	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Horizontal Brace 1.8m, 2.5m, 3m	6	6	6	6	6	8	8	8	8	8	8	8	8	10	10	10	10	10	10	10	10
Diagonal Brace, 1.8m, 2.5m, 3m	3	4	5	7	7	8	9	11	11	12	13	15	15	16	17	19	19	20	21	22	23
Toeboard Set DW 1.8m, 2.5m, 3m	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Fixed Stabiliser	0	4	4	4	4	4	2	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Telescopic Stabiliser	0	0	0	0	0	0	0	4	4	4	0	0	0	4	4	4	4	4	4	4	4
Semi Jumbo Stabiliser	0	0	0	0	0	0	0	0	0	0	4	4	4	0	0	0	0	0	0	0	0

Note: Towers in excess of these heights need to be 'Tied-in' to a secure structure.